

Figure 2-Source Data


Figure 2A

Peri α His

Original image




Used area

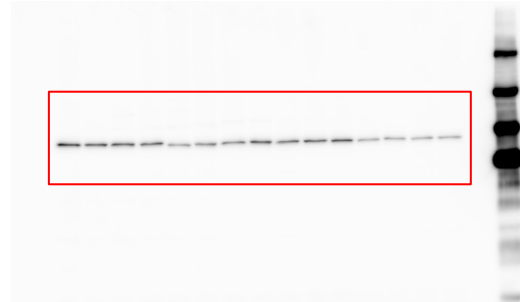


Peri α BepA

Original image

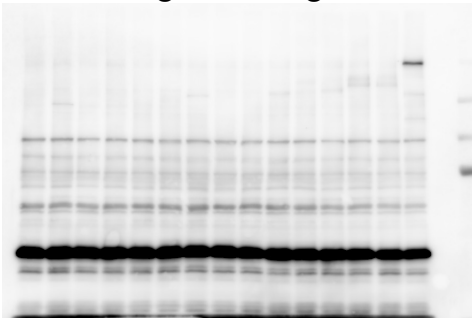

Used area

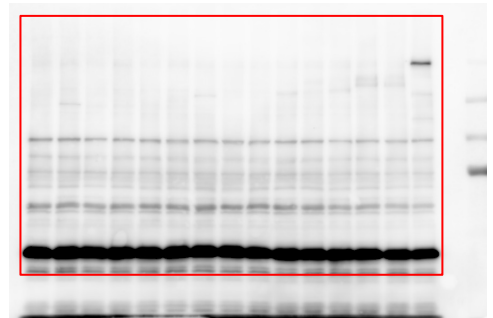


β -N α His

Original image




Used area

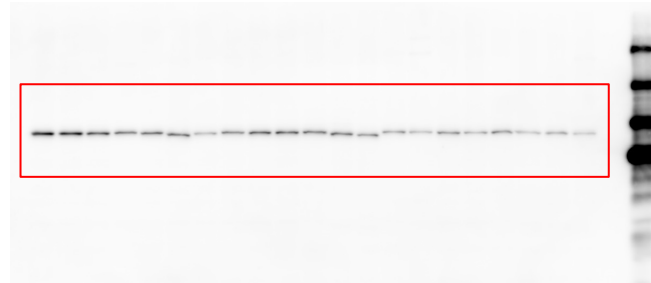

β -N α BepA

Original image

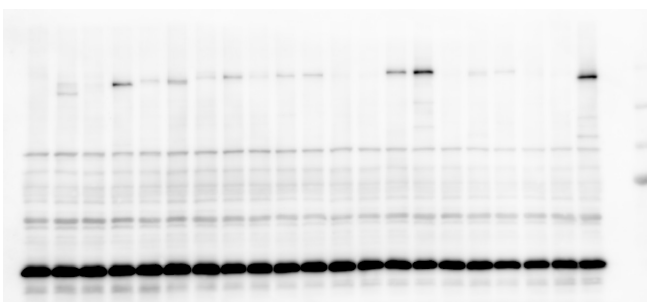

Used area

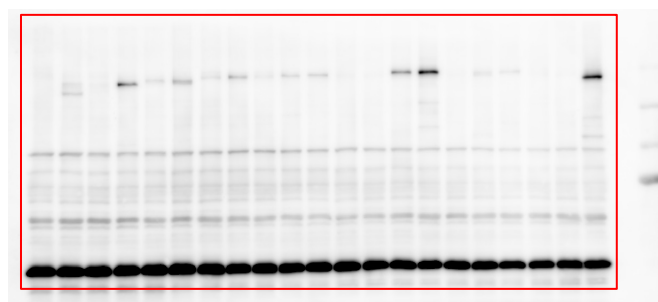


Figure 2-Source Data

β -C α His

Original image




Used area



β -C α BepA

Original image

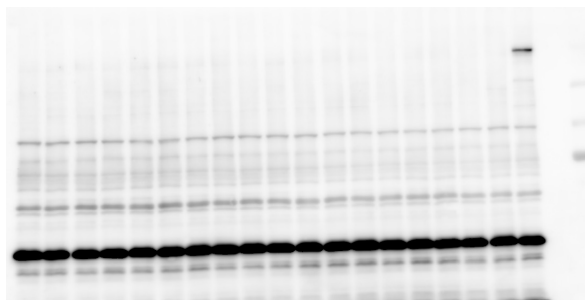

Used area

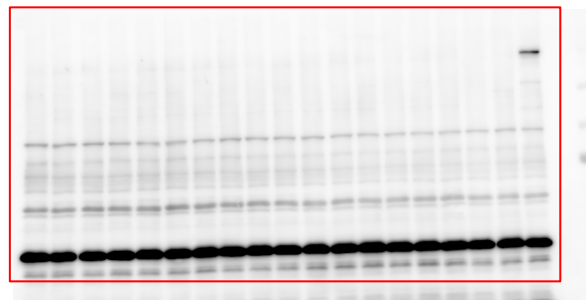



Figure 2B

α His

Original image




Used area

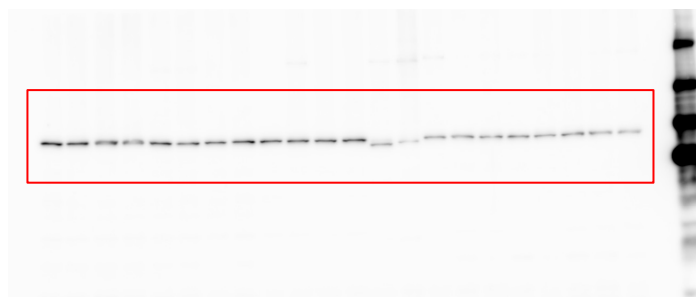


α BepA

Original image

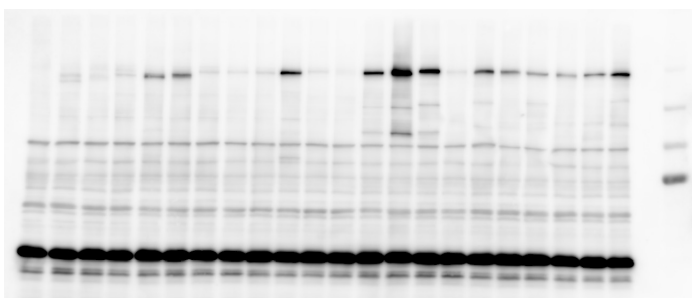

Used area

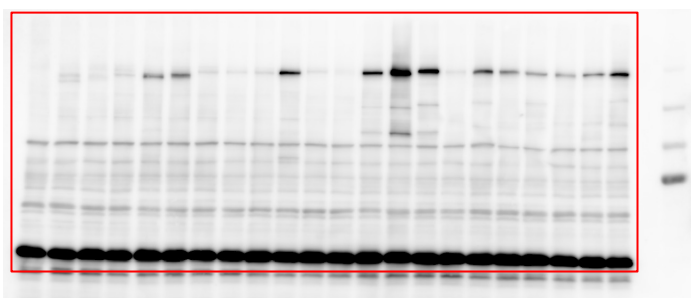

The "original" images were constructed by the image processing (including rotation, flip, contrast adjusting, and/or cropping) of the corresponding raw data.