



## Table of contents

1. Selected input sequences .....	3
1.1 Sequence reads .....	3
1.2 Reference Sequences .....	3
2. References .....	3
3. Read quality control .....	3
3.1 Strand specificity .....	3
3.2 Adapter read-through .....	3
3.3 Paired distance .....	4
4. Mapping statistics .....	4
4.1 Paired reads .....	4
4.2 Match specificity (paired) .....	5
5. Fragment statistics .....	5
5.1 Fragment counting (total) .....	5
6. Transcript length coverage .....	6

# 1. Selected input sequences

## 1.1 Sequence reads

Name	Number of reads	Longest read	Paired
SRR11092056_1 (paired, trimmed pairs)	10,457,056	151	yes

For paired data, there are two reads in a pair.

## 1.2 Reference Sequences

References	Length	Genes
164,291	597,293,918	164,291

# 2. References

# 3. Read quality control

## 3.1 Strand specificity

Strand specific setting	Both
Forward % of reads mapped	45.44
Reverse % of reads mapped	54.56
Reads with known strand	749,396
Ignored reads (wrong strand)	0
Ignored reads % (wrong strand)	0.00

Strand specificity refers to whether a read is generated by sequencing an RNA fragment in the Forward (5' to 3') or Reverse (3' to 5') orientation. In a strand-specific protocol almost all reads are generated from a specific orientation. In other protocols a mix of both orientations is expected.


## 3.2 Adapter read-through

Estimated % containing read-through adapters	0.04
--	------

This value is estimated from the number of mapped paired-end reads where one read is longer than the sequenced RNA fragment.

A small percentage of read-through adapters is unlikely to affect the quantification of expression, but their presence may lead to false positive variant calls. To remove a read-through adapter, run the "Trim Reads" tool on the input reads, using either Automatic read-through adapter trimming or a Trim Adapter List configured to remove the adapter sequence from the 3' end.

### 3.3 Paired distance

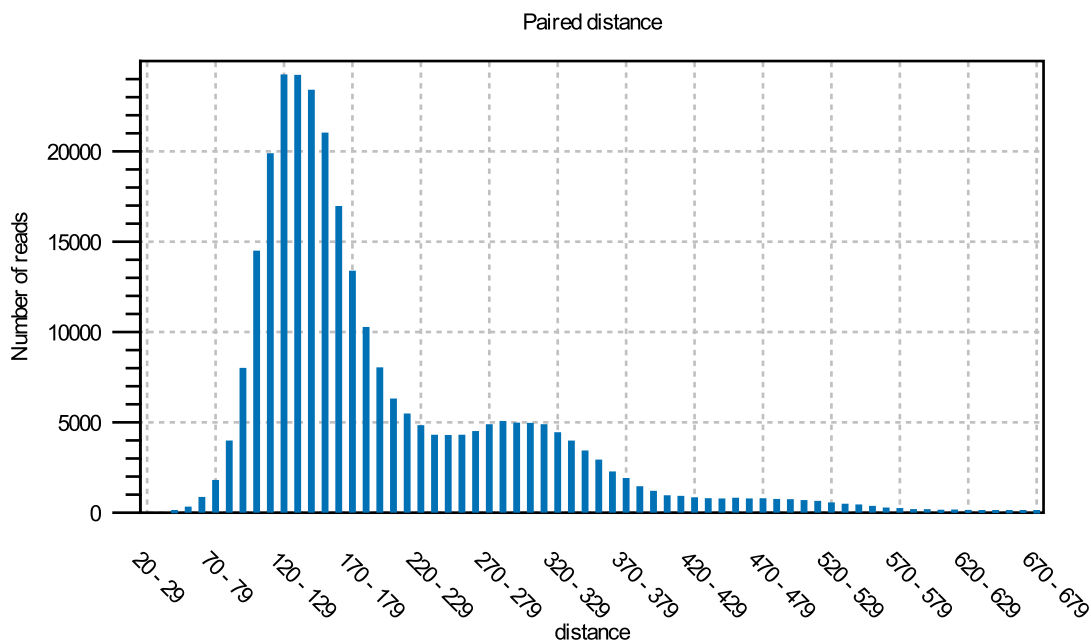

The graph shows the distribution of paired-end distances, which is equivalent to the distribution of sequenced RNA fragment sizes. There should be a single broad peak at the target fragment size. An asymmetric peak may indicate problems in size selection.

Reads	Paired distance estimates	Messages
SRR11092056_1 (paired, trimmed pairs)	21 to 677 bp	Few reads mapped as pairs so pair distance might not be accurate

## 4. Mapping statistics

### 4.1 Paired reads

	Number of sequences	%
Reads mapped in pairs	570,820	5.46
Reads mapped in broken pairs	178,576	1.71
Reads not mapped	9,707,660	92.83

	Number of sequences	%
Total	10,457,056	100.00


For paired data, there are two reads in a pair.

If a strand specific setting was used, 'Reads not mapped' will include those reads that were ignored because they mapped to the wrong strand.

Reads not mapped: >50% of the reads did not map. If the correct reference genome has been selected, this could indicate a serious problem with the sample.

- Check that the correct reference genome and any relevant gene/mRNA tracks have been provided.
- The mapping parameters may be too strict. Try resetting them to the default values.
- Try mapping the un-mapped reads against possible contaminants. If the sample is contaminated, enrich for the target species before library preparation in future experiments.
- Library preparation may have failed. Check the quality of the sample RNA.

## 4.2 Match specificity (paired)

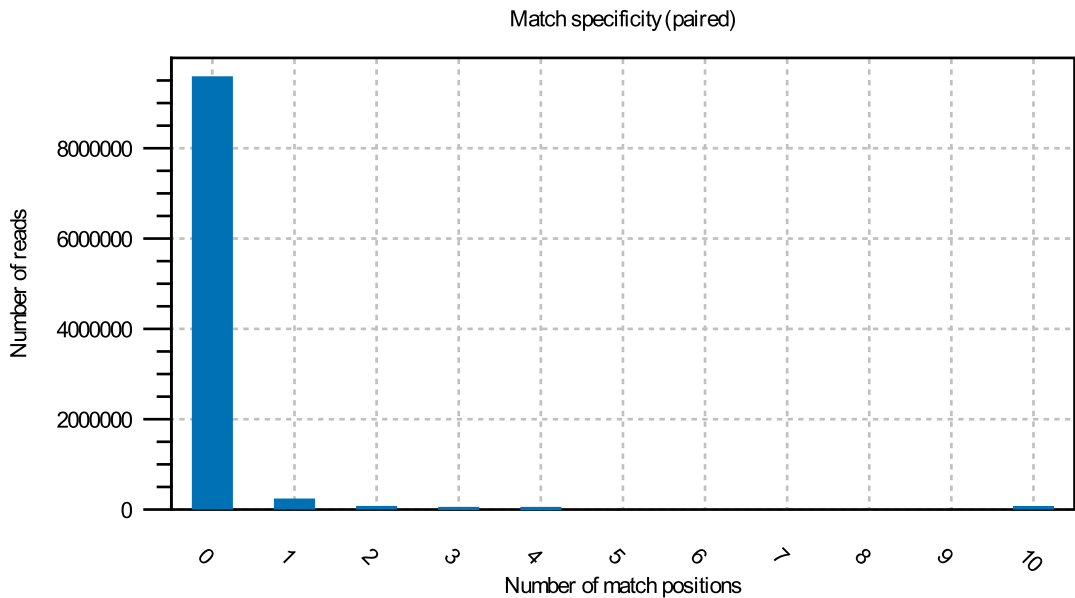

## 5. Fragment statistics


### 5.1 Fragment counting (total)

	Fragments	% of total
Counted fragments	285,410	5.46
- unique fragments	121,963	2.33
- non-specifically	163,447	3.13
Uncounted fragments	4,943,118	94.54

	Fragments	% of total
Total fragments	5,228,528	100.00

Default counting scheme ('Fragment counts'): An intact pair is counted as one, broken pairs are ignored.

## 6. Transcript length coverage

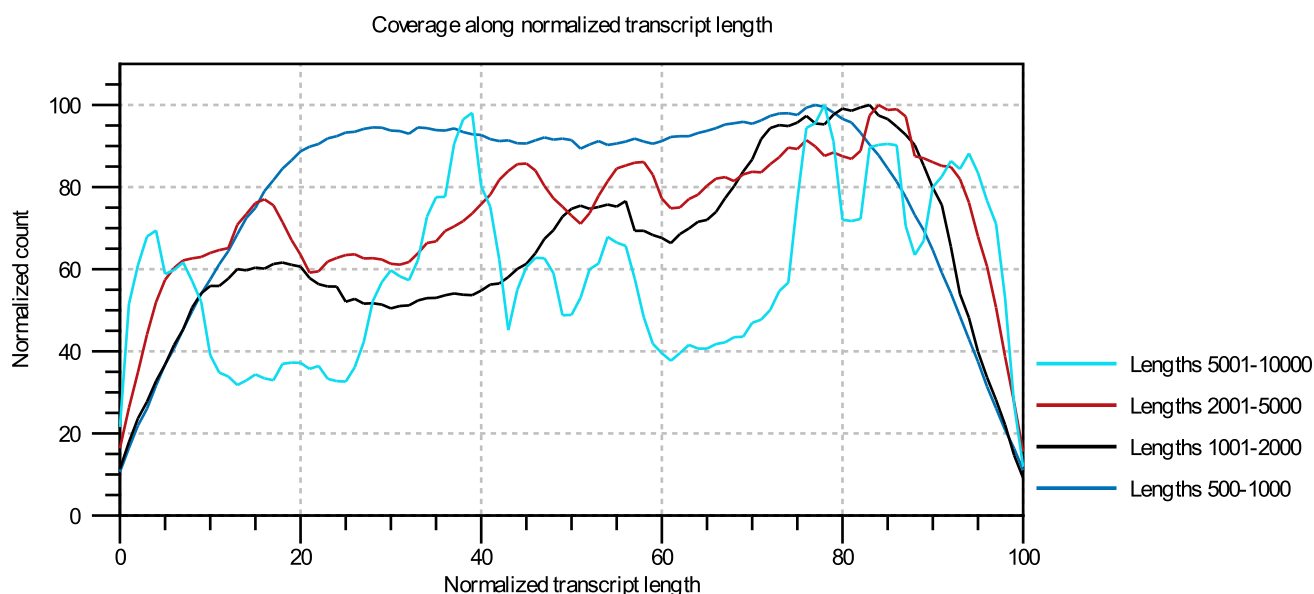

Expected coverage bias	Unbiased
Difference between average 3' and 5' normalized counts	15.22
% reads mapping to transcripts > 10000 bp	14.21
% reads mapping to transcripts 5001 - 10000 bp	36.33
% reads mapping to transcripts 2001 - 5000 bp	35.21
% reads mapping to transcripts 1001 - 2000 bp	11.99
% reads mapping to transcripts 500 - 1000 bp	1.90
% reads mapping to transcripts < 500 bp	0.37

The plot shows the normalized coverage across a transcript body for four different groupings of transcript length. The lines should be flat in the center of the plot, and the plot should be approximately symmetric. An erratic line may indicate that there are few transcripts in the given length range.